




**ELEVATION**

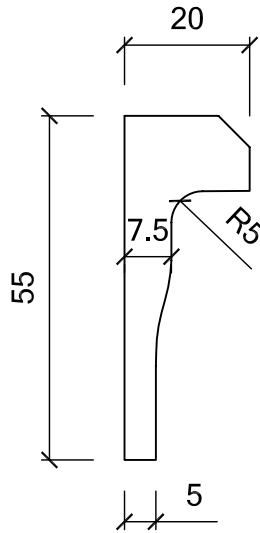

**WEDGE**

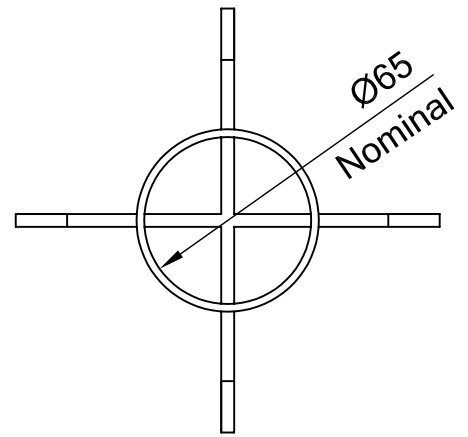


**SECTION A-A**

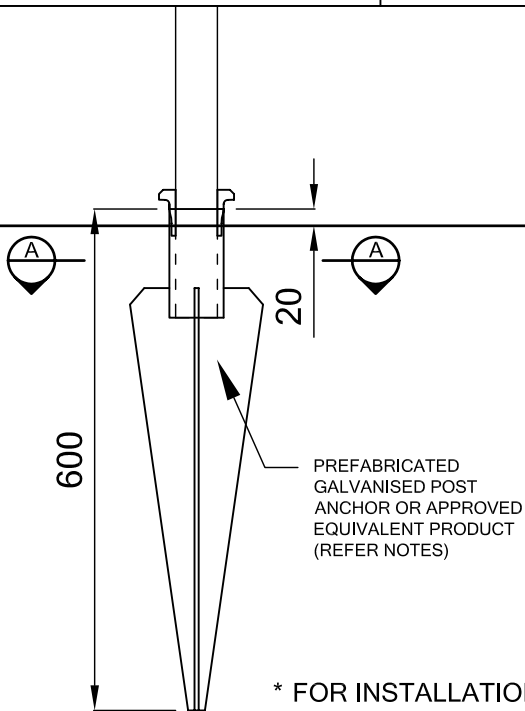

**DETAIL 1**

\* FOR INSTALLATION IN STABLE GROUND CONDITIONS

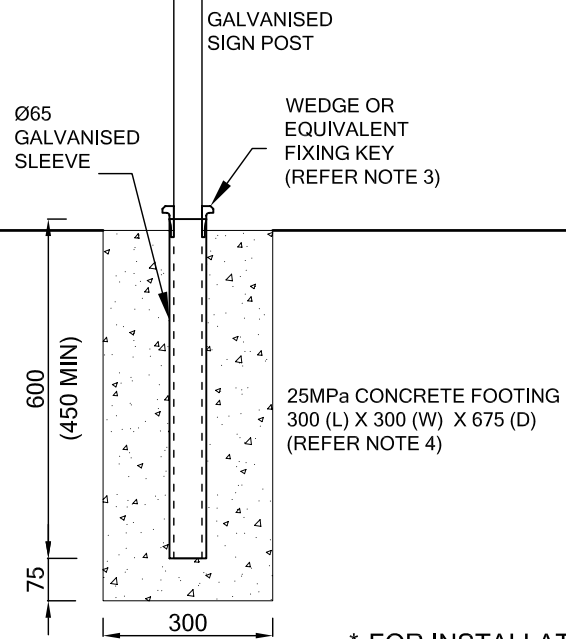

**DETAIL 2**

\* FOR INSTALLATION IN UNSTABLE GROUND CONDITIONS

**NOTES:**

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS STATED OTHERWISE
2. USE CAUTION NOT TO DAMAGE UNDERGROUND PIPES OR SERVICES WHEN DRIVING POST ANCHOR INTO GROUND
3. TWO (2) WEDGES TO BE INSERTED INTO POST SLEEVE AFTER SIGN IS CORRECTLY ALIGNED
4. MINIMUM STRENGTH 25MPa CONCRETE FOR FOOTING WHERE SOFT / SANDY / LOW COHESIVE SOILS EXIST (REFER TO DETAIL 2)

<b>AMENDMENTS</b>	<b>DATE</b>		<h2>SIGN INSTALLATION</h2>	DRAWN BY: <b>AC</b>
				DATE: <b>JAN '07</b>
				SCALE: <b>N.T.S.</b>
				DRAWING NO.: <b>SD / T6</b>
				MANAGER CIVIL DEVELOPMENT SERVICES 