


ELEVATION: POST AND WIRE FENCE

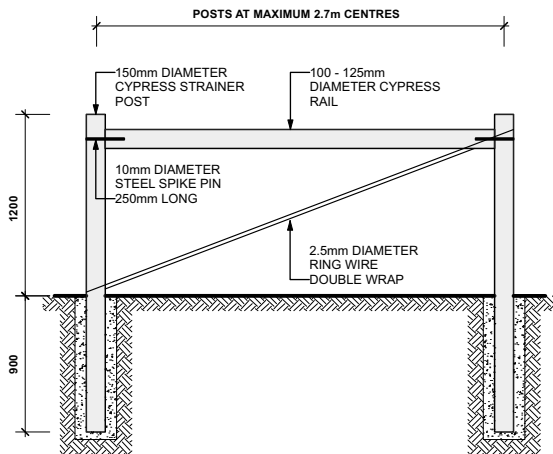

ELEVATION: STRAINER POST ASSEMBLY AND CORNER

NOTES

- 1 TIMBER SHALL BE OF GOOD QUALITY AND GENERALLY FREE FROM SPLITS AND DEFECTS.
- 2 TIMBER SHALL BE LEFT RAW. NO PAINT OR STAINS ARE TO BE APPLIED.
- 3 WIRE FENCING SHALL BE UTILISED IN AREAS AROUND PLANTING AND AREAS MARKED FOR BUSHLAND CONSERVATION.
- 4 NO BARBED WIRE UNLESS REQUIRED.
- 5 WHERE ADJACENT TO LAWN AREAS, MESH IS OMITTED FOR 4 EVENLY SPACED STRANDS OF FENCING WIRE. LOWER STRAND TO ALLOW CLEARANCE FOR BRUSHCUTTING / MOWING