


ELEVATION

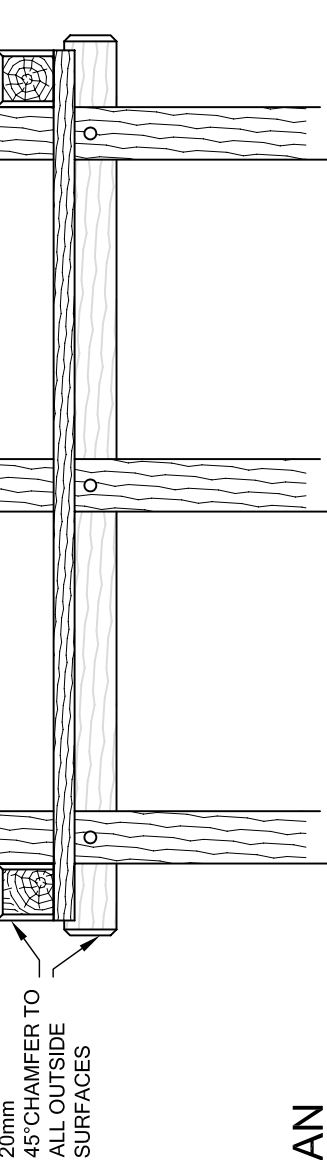

SECTION A-A

PLAN

NOTES:

1. ALL DIMESIONS ARE IN MILLIMETRES UNLESS OTHERWISE INDICATED
2. TIMBER TO BE FIRST QUALITY CCA TREATED PINE, GENERALLY FREE OF SPLITS AND SHAKES
3. Ø175 CCA TREATED PINE LOGS TO BE FIXED WITH Ø12 x 350 H.D. GALVANISED COACH BOLTS, COUNTERSUNK. LOGS TO REMAIN UNPAINTED.
4. SAWN TIMBER TO BE PAINTED WITH OIL BASED UNDERCOAT, THEN TWO (2) COATS OF BRUNSWICK GREEN (AS2700 NO. G11).

AMENDMENTS	DATE
ORIGINAL - WDA	8/97
REDRAW	1/07



HORSE CAVELETTI

MANAGER CIVIL DEVELOPMENT SERVICES

W. W. W. W.

DRAWN BY:	WDA
DATE:	JAN '07
SCALE:	N.T.S.
DRAWING NO.:	SD / F9